ASSA 1596

Rim Lock



Performance

5-pin cylinder lock for material thickness up to 23 mm. Rim fitting night latch with automatic deadlocking. Cylinder of bright chrome plated brass and keys of nickel plated brass. Can be master keyed. Can be supplied with optional deadbolt on request.

Function

The key turns 90° and can only be removed when the bolt is in the locked position.








ASSA 1596

Rim Lock

Dimension (mm)






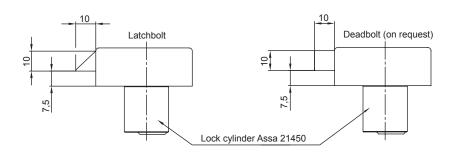

Hole preparation





ASSA ABLOY, the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

ASSA OEM AB P.O. Box 371 SE-631 05 Eskilstuna Sweden

phone +46 (0)16 17 70 00 fax +46 (0)16 17 74 51

Customer support: phone +46 (0)16 17 79 50 fax +46 (0)16 17 70 18 e-mail: csg@assaoem.se

Included in part no: 390559 000 011

Part no.

491155 000 002 Keys (2 pieces)

Material **Brass**

Finish Nickel plated

Cylinder housing: Zink plated steel Core: Zink plated steel Accessories, see data sheet "Accessories" Catches, see data sheet "Catches" Spare parts, see data sheet "Spare parts"