

Monteringsanvisning

Ventilationsbeslag GYYG 93, för utåtgående fönster.

Barnskyddande, typgodkänd.





Montering

Max. öppning skall vara 100 mm.



För större fönsteröppning än 100 mm:
Frikoppla beslaget genom att trycka
armen kraftigt åt höger när karmfästets
tapp är i frikopplingsläget (strax före
max öppningsläge).

Återkoppling till spärrläget sker automa-
tiskt när fönstret stängs.

Montering

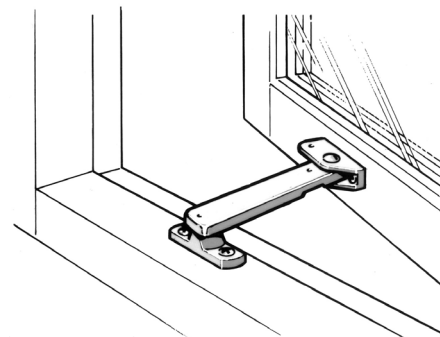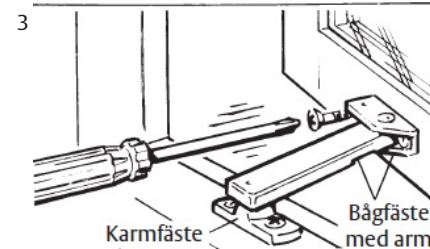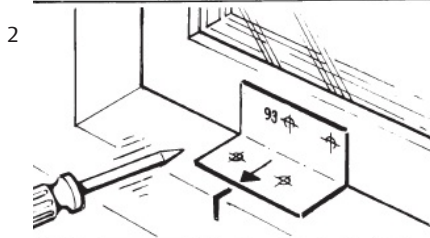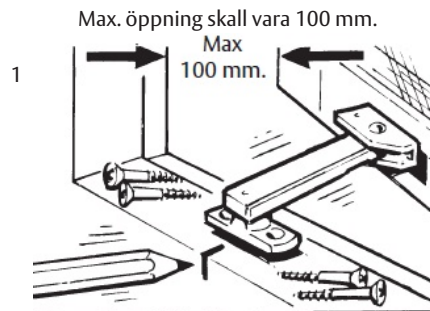

Frikopplingsläge

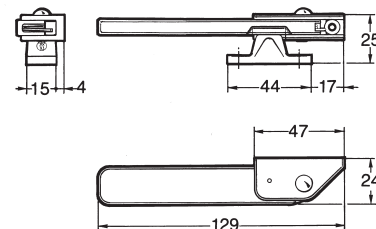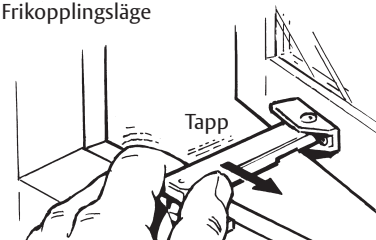

ASSA®

ASSA ABLOY

ASSA OEM AB

Bu-8787

4688 8 Göteborg

Tel. 031 - 704 40 00

info.nm@assaoem.se

www.assaoem.se

OEM9021.1112.112 / KT 732

Fitting instructions

Ventilation stay GYYG 93, for inward-opening windows.
Childproof.

Fitting



Max. opening should be 100 mm.

For opening larger than 100 mm:
Release the fitting by pressing the arm
to the right when the frame fixture is in
release-position.



The locking function is resumed auto-
matically when the sash is closed.

Fitting

Max. opening should be 100 mm.

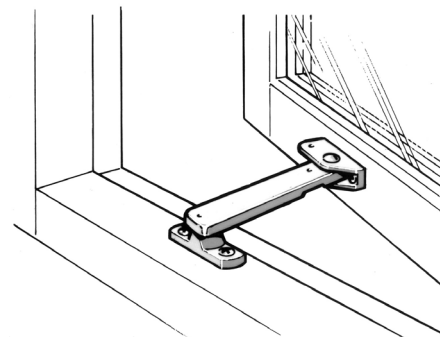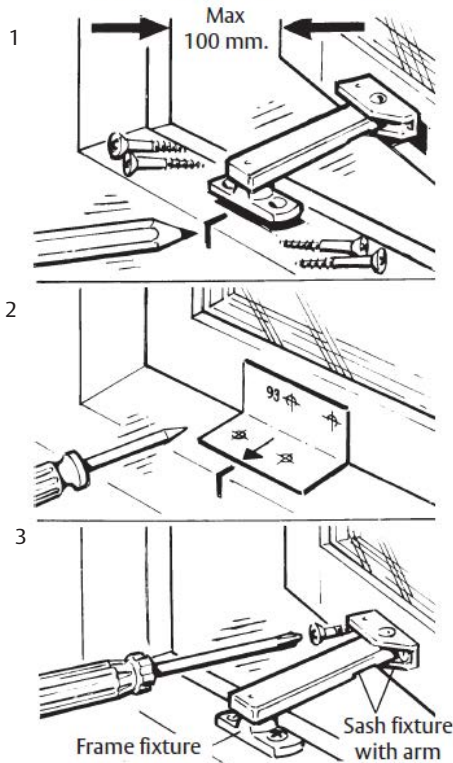

Release-position

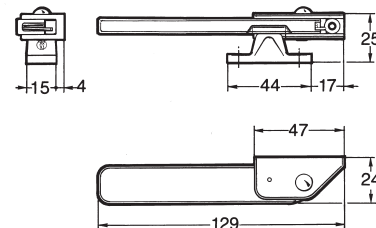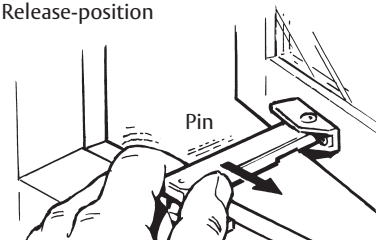

ASSA®

ASSA ABLOY

ASSA OEM AB
Bu-8878?
4688 8 Göteborg
+46 (0)31-704 40 00
info.nm@assaoem.se
www.assaoem.se

OEM9021.1112.112 / KT 732

ASSA[®]
ASSA ABLOY
93



ASSA[®]
ASSA ABLOY
93



ASSA[®]
ASSA ABLOY
93



KT639



KT639



KT639

ASSA[®]
ASSA ABLOY
93



ASSA[®]
ASSA ABLOY
93



ASSA[®]
ASSA ABLOY
93



KT639



KT639



KT639